



鎮江宏馬精細化工有限公司

ZHENJIANG WHOLEMARK FINE CHEMICAL CO., LTD.


鎮江市長江路 35 號濱江商務公館 301 室

Suite 301, Binjiang Business Centre, 35 Changjiang Road, Zhenjiang, China, 212002

Tel: +86-511-88616892

Fax: +86-511-88616995

Technical Data Sheet

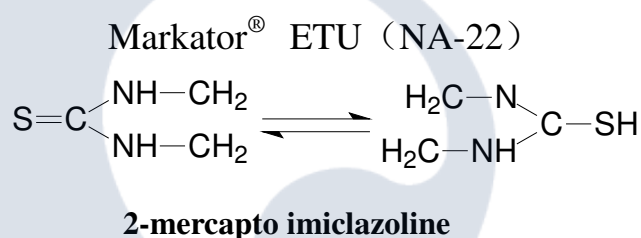

APPLICATION

Has little tendency to scorch and a high degree of processing safety. Enables proper vulcanization to be attained speedily at normal vulcanizing temperatures. Presents characteristic vulcanization kinetics and gives the vulcanization with excellent physical properties (high tensile strength, low compression set, large plasticity and good heat resistance).

SPECIFICATION

Item	pdr	pdr-d	grs-2mm
Appearance:	White	White	White
Initial M.P (Min) °C	195.0	194.0	194.0
Loss on drying (Max) %:	0.40	0.40	0.40
Ash (Max) %:	0.30	0.30	0.30
Residue on 63µm sieve (Max) %:	0.50	0.50	--
Residue on 150µm sieve (Max) %:	0.10	0.10	--
Oil content %:	--	1.0 – 2.0	--

HANDLING PRECAUTIONS

For detailed information on toxicological properties and handling precautions please refer to the current Safety Data Sheet. This information sheet can be downloaded from our web site or requested from Wholemark and should be consulted before handling this product.

STORAGE RECOMMENDATIONS:

ETU in sight stacked pallets in a cool, dry, well-ventilated area, avoiding exposure of the packaged product to direct sunlight. Double stacking of palletized material and/or exceeding 35°C can result in unusual compaction of product.

PACKING:

25kg paper bag.

Issue Date: 01-Jan-2024